



- 輸入:類比輸入4~20mA
- 輸出: RS-485

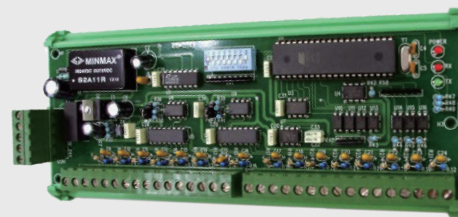

規格特性

- ◆ 通道 : 16
- ◆ 輸入 : DC 4~20mA (Analog input)
- ◆ 操作溫度 : 0~60°C / Below 80%R.H.
- ◆ 儲存溫度 : -10~70 / Below 70% R.H.
- ◆ 供電 : DC 24 ± 20%
- ◆ 介電強度 : AC 1500V/1min (Input/ Power)
- ◆ 絕緣電阻 : More than 100M at 500VDC
- ◆ 安裝方式 : DIN rail
- ◆ 尺寸 : 203(W) x 81(H)mm
- ◆ 輸出 : RS-485
- ◆ 通訊協議 : Modbus RTU mode
- ◆ 鮑率 : 9600 or 19200

指撥開關



SW	說明
1	Address bit 0
2	Address bit 1
3	Address bit 2
4	Address bit 3
5	Address bit 4
6	Address bit 5
7	OFF = None parity check , 1 stop bit ON = None parity check , 2 stop bit
8	OFF = Baud rate 9600 ON = Baud rate 19200

配線圖

