


- B-series(柵欄端子)
- 電流大小配合孔徑尺寸(80mm)
- 扣式開口,易安裝,安全卡扣
- 輸入訊號: 4000A~6000A
- 輸出訊號: 5Aac, 適用業界所有儀錶接收
- 操作安全,不需火線作業
- 禁止開路使用,請務必先將輸出端負載裝置接好


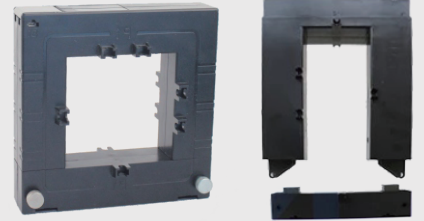


規格特性

- ◆ 頻率: 50~60 Hz
- ◆ 額定電流: 4000A to 6000A loads
- ◆ 額定輸出: 5A (AC)
- ◆ 精度: Class 0.5 or 1 from 20% to 120% of rated current
- ◆ 相位角: Less than 2 degrees at 50% of rated current
- ◆ 絕緣電壓: 600 Vac
- ◆ 最大初級電壓: 5000 Vac (Insulated Conductor)
- ◆ 介電強度: 2.5KV/ 1mA/ 1min
- ◆ 工作溫度: -15°C to 60°C
- ◆ 工作濕度: <85%
- ◆ 外殼材質: PC/UL94~V0
- ◆ 孔蓋材質: PBT
- ◆ 線圈材質: Permalloy
- ◆ 內部結構: Epoxy
- ◆ 線徑電流: 4000/ 5A Ø80mm
5000/ 5A Ø80mm
6000/ 5A Ø80mm

尺寸圖

- 電流: 4000A, 5000A, 6000A

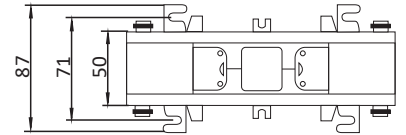

選用型號規格

DCSCT-80B - 代碼1 - 代碼2

| 碼1 | 輸入訊號 | 碼2 | 輸出訊號 |
|------|----------|----|-------|
| 4000 | 1500 Aac | 5 | 5 Aac |
| 5000 | 2500 Aac | | |
| 6000 | 3000 Aac | | |