



DCTH LCD溫濕度傳送器
 DCTH-H LCD溫濕度傳送器
 DCTH-N 溫濕度傳送器



DCTH-RA Lora型溫濕度傳送器

規格特性

- ◆ 溫度範圍: 0~50°C, 0~100°C, -50~+50°C
 32~122°F, 32~212°F, -58~122°F
- ◆ 濕度: 0~100%RH
- ◆ 工作環境: DC 18~30V
- ◆ 操作環境: -20~+80°C / below 90%RH.
- ◆ 儲存環境: -20~+60°C / below 90%RH.
- ◆ 反應時間: >1 sec.
- ◆ 輸出: 4~20mA, 2-wire loop powered
 RS-485
- ◆ 負載阻抗: ≤500Ω
- ◆ 尺寸: 85(W)×120(H)×30(D)mm


Model : DCTH

- ◆ 精度: ±3% rH , ±0.4°C
- ◆ 範圍: -30~130°C, 0~100%RH

Model : DCTH-H

- ◆ 精度: ±1.8% rH , ±0.2°C
- ◆ 範圍: -40~125°C, 0~100% rH


訂購規格

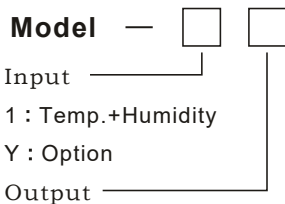


- 1 : DC 4~20mA
- 2 : Relay × 2
- 3 : RS-485 + Relay × 2
- R : RS-485

接線圖


1 : DC 4~20mA

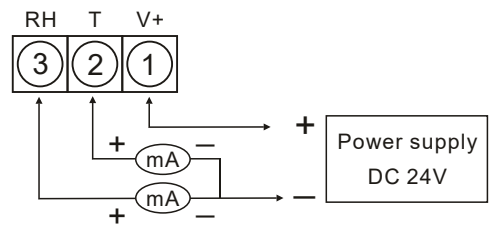

2 : Relay ×2

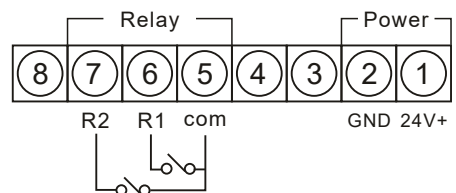

3 : RS-485+Relay ×2

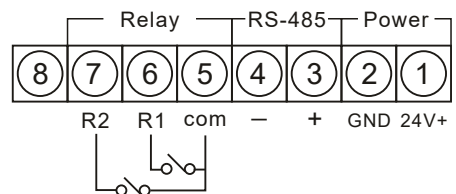

R : RS-485

