



- 輸入: 勾式CT(30A,50A,100A) 超過100A另洽
- 輸入: DC4~20mA*2(可訂製)
- 輸出: RS-485

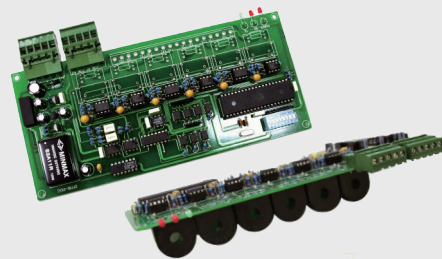

規格特性

- ◆輸入 : Current**6
- ◆範圍 : AC clamp CT 30A or 50A or100A, more than 100A, please negotiate separately.
- ◆精度 : ±1%
- ◆操作溫度 : 0~60 / Below 80%R.H.
- ◆儲存溫度 : -10~70 / Below 70% R.H.
- ◆供電 : DC 24±20%
- ◆介電強度 : AC 1500V/1min (Input/Power)
- ◆絕緣電阻 : More than 100M at 500VDC
- ◆輸出 : RS-485
- ◆通訊協議 : Modbus RTU mode
- ◆鮑率 : 9600, 19200
- ◆通訊格式 : N81, N82

尺寸圖 (mm)

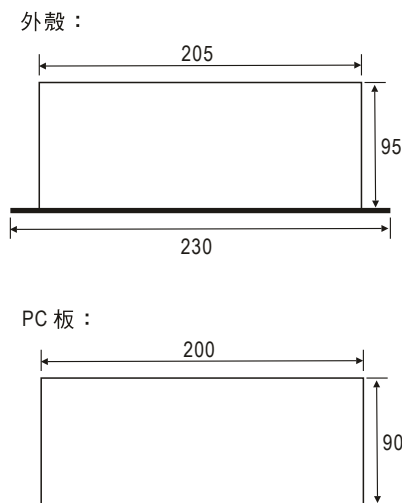


● 6組電流(5A)

● 外接勾式CT

● 勾式CT(AC clamp): 30A, 50A, 100A



指撥開關



1~6Pin設定位址:01~64
 7Pin設定Fame:OFF→N.8.1/ ON→N.8.2
 8 Pin設定鮑率:OFF→9600/ ON→19200
 A/D : 12 bit

配線圖

● 6組扣式CT

